


VBLED

RF Constant Current LED Driver




Art.Nr.:410465

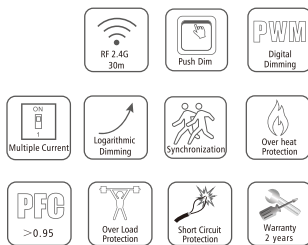

Features

- Dimming interface: RF Wireless, AC Push-Dim
- Match with VBLED's 2.4G single color remote control, one RF LED driver accepts up to 10 remote controls
- Universal AC input / Full range
- 1 channel constant current output, configurable current via DIP switch
- Built-in active PFC function: 0.95 Typ
- Auto-transmitting function: LED driver automatically transmit signal to another LED driver with 30m control distance
- Synchronize on multiple number of LED drivers
- Over-heat / Over-load / Short circuit protection, recover automatically
- Full protective plastic case
- Suitable for indoor LED lighting application
- 2 Year, 20,000hr warranty

Mechanical Structures and Installations

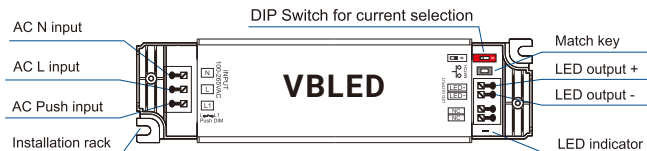


Output Current Selection:

DIP switch position		
Output Current	350mA	700mA


Technical Parameters

Output	Output Voltage	10-52VDC	10-52VDC
	Output Current	350mA	700mA
	Output Power	Max.18W	Max.36W
	Max Output Voltage	52VDC	52VDC
	Dimming Range	0 ~ 100%	0 ~ 100%
	PWM Frequency	500Hz	500Hz
	Current Accuracy	±3%	±3%
Input	Rise Time	1s (Max350mA / 30V)	1s (Max700mA / 30V)
	Input Voltage Range	100VAC~265VAC	
	Frequency Range	50/60Hz	
	Efficiency	>82%/115VAC, >84%/230VAC	
	Alternating Current	0.38A/115VAC, 0.19A/230VAC	
	Power Factor	>0.99/115VAC, >0.95/230VAC	
	THD	>15%/230VAC	
	Inrush Current	Cold start 16A at 230VAC	
	Leakage Current	< 0.5mA/230VAC	
	No Load Power	< 2W	
Protection	Over Load Power	When O/P voltage exceed its range, O/P current declines, auto recovers when the load is reduced.	
	Short Circuit	Shut down automatically if short circuit occurs, auto recovers.	
	Over Temperature	Intelligently adjust or turn off the output current if the PCB temp > 100°C, auto recovers.	
Environment	Working Temperature	-30°C ~ 50°C	
	T-case Max	70°C	
	Working Humidity	20% ~ 90%RH, non-condensing	
	Storage Temp/Humidity	-40°C ~ 80°C, 10% ~ 95%RH	
	Temperature Coefficient	±0.03%/°C (0-50°C)	
	Vibration Resistance	10-500Hz, 2G, 6min/cycle, X,Y,Z axes/2min	
Safety&EMC	IP Rating	IP20	
	Security Specifications	IEC/EN61347-1, IEC/EN61347-2-13	
	Withstand Voltage	I/P-O/P: 3750VAC	
	Insulation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH	
	EMC Emission	EN55015, EN61000-3-2 Class C, IEC61000-3-3	
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547	
	Certifications	CE, EMC	



Wiring Diagram

1. RF Connection

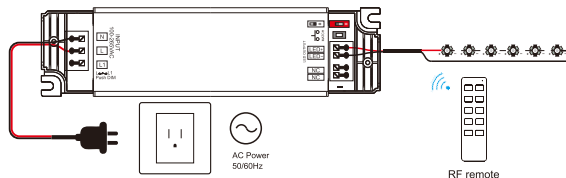


■ **Pairing Remote Control, End user can choose the suitable pairing/delete ways. Two options are offered for selection:**

selection	Pairing	Delete
Use Match Key	Short press match key, immediately press on/off key (single zone remote) or zone key (multiple zone remote) of the remote.	Press and hold match key for 5s to delete all match. The light blinks 5 times means all matched remotes were deleted.
Use Power Restart	Switch off the power, then switch on power again, immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote. The light blinks 3 times means match is successful.	Switch off the power, then switch on power again, immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote. The light blinks 5 times means all matched remotes were deleted.

■ **When use multiple RF drivers, two application method:**

① All the drivers in the same zone.




- **Auto-transmitting:** One driver can transmit the signals from the remote to another driver within 30m, as long as there is a driver within 30m, the remote control distance can be limitless.
 - **Auto-synchronization:** Multiple drivers within 30m distance can work synchronously when they are controlled by the same remote.
- Driver placement may offer up to 30m communication distance. Metals and other metal materials will reduce the range. Strong signal sources such as WIFI routers and microwave ovens will affect the range. We recommend for indoor applications that driver placements should be no further apart than 15m.

② Each driver(one or more) in a different zone, like zone 1, 2, 3 or 4.




2. AC Push-Dim connection

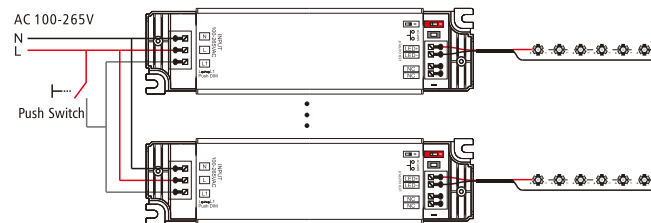

■ The provided AC Push-Dim interface allows for a simple dimming method using commercially available non-latching (momentary) wall switches.

- **Short press:**
Turn on or off light.
- **Long press (1-6s):**
Press and hold to step-less dimming,
With every other long press, the light level goes to the opposite direction.
- **Dimming memory:**
Light returns to the previous dimming level when switched off and on again, even at power failure.
- **Synchronization:**
If more than one LED driver are connected to the same push switch, do a long press for more than 10s, then the system is synchronized and all lights in the group dim up to 100%. This means there is no need for any additional synchrony wire in larger installations. We recommend the number of LED drivers connected to a push switch does not exceed 25 pieces. The maximum length of the wires from push to LED driver should be no more than 20 meters.

Dimming Curve



Barite International GmbH
Neidenburger Str.9,
28207 Bremen Germany
Tel: 0421 59702112
<https://www.barite.de>